



日成铜管端子 SC

冷压端子,铜管端子,日成端子

产品材质:接线端子采用优质紫铜制成,导电性良好

产品特点:采用优质亚光电镀,防锈时间大大加长,无锋利部位;


配套日成端子钳即可压紧电线,接线美观,

国际认证:欧盟RoHS环保认证,欧洲CE认证.

产品特性:品质优良,压紧后不断裂松开,-40度耐热至150度正常使用.

使用方法:将电线剥开外皮,穿入端子后铜管

产品规格

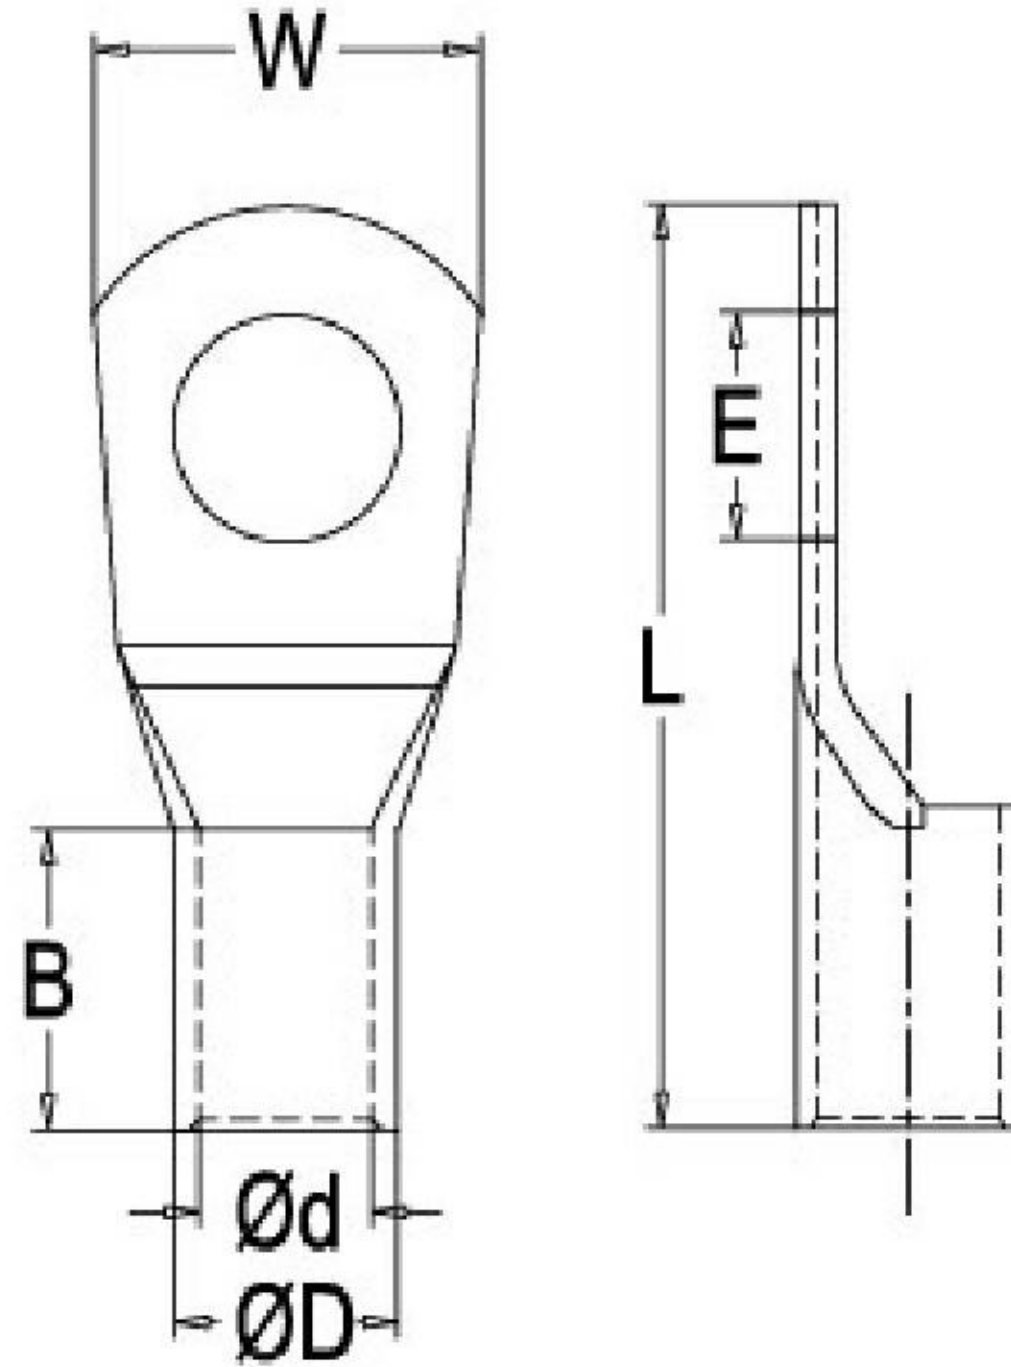

型号 Item No.	E	φ D	φ d	W	B	L
SC4-6	6.5	4.8	3.1	10	7	20
SC10-6	6.5	6.2	4.5	12	9	25
SC10-8	8.4	6.2	4.5	12.5	9	27
SC16-6	6.5	7.1	5.4	12	12	30
SC16-8	8.4	7.1	5.4	12.5	12	30
SC25-6	6.5	8.8	6.8	13	12	33
SC25-8	8.4	8.8	6.8	15	12	33
SC35-6	6.5	10.6	8.2	16	14	38
SC35-8	8.4	10.6	8.2	16	14	38
SC35-10	10.5	10.6	8.2	18	14	39
SC50-8	8.4	12.4	9.5	17.8	16	45
SC50-10	10.5	12.4	9.5	17.8	16	45
SC70-8	8.4	14.7	11.2	21	20	52
SC70-10	10.5	14.7	11.2	21	20	52
SC95-8	8.4	17.4	13.5	25	23	58
SC95-10	10.5	17.4	13.5	25	23	58